

# Data Sheet

## Super Noise-Lock® W-60 Acoustic Window

IAC Acoustics A/S  
 T: +45 36 77 88 00  
 E: mail@iac-nordic.dk  
 www.iac-nordic.dk



### Overview

- Certified acoustic performance rating
- Manufactured to standard and custom sizes
- Rugged all steel construction
- Finished in polyester powder coating as standard

### Acoustic Rating

Rw (C; Ctr) 60 (-3; -8) dB to achieve minimum R'w58dB once installed (subject to flanking).

STC-60(dB) to achieve minimum NIC 58 once installed (subject to flanking).

Calculated performance using standard 350mm (14") wall thickness arrangement as follows:

Frequency (Hz)	63	125	250	500	1k	2k	4k	8k
<b>Full Octave Sound Transmission Loss (dB)</b>	<b>26</b>	<b>38</b>	<b>47</b>	<b>57</b>	<b>66</b>	<b>70</b>	<b>80</b>	<b>-</b>

#### Standard Features



Acoustic  
Rated

#### Optional Extras



Fire  
Rated



Bullet  
Resistance



Angled  
Panels

## Overview


IAC Acoustics produces an engineered system — custom-designed in house to suit the required opening of any given project. Utilising precision laser cutting and state-of-the-art fabrication, all IAC Super Noise-Lock® windows are simple to assemble on site by our network of highly experienced installation crews.

IAC Super Noise-Lock® windows are laboratory tested for performance in both IAC's own R&D facilities and independent laboratories, further supported by installed site testing. IAC Acoustics is renowned for quality, durability and guarantees in-field performance.

## Design Features

IAC Super Noise-Lock® windows are available with a number of standard and custom design options. Please consult IAC Acoustics for availability of both standard and bespoke features such as angled panes, bullet resistant glass and EN 16 34-1 (EI) fire rated frames in various ratings from E30 to EI90. All IAC Super Noise-Lock® windows are built to order and site assembled using laminated safety glass as standard.

- ① 12.8mm laminated safety glass
- ② 12.8mm laminated safety glass
- ③ Acoustic foam      ③a Optional perforated reveal
- ④ Host wall
- ⑤ Neoprene acoustic seal
- ⑥ Painted steel capping frame
- ⑦ Acoustic foam retainer

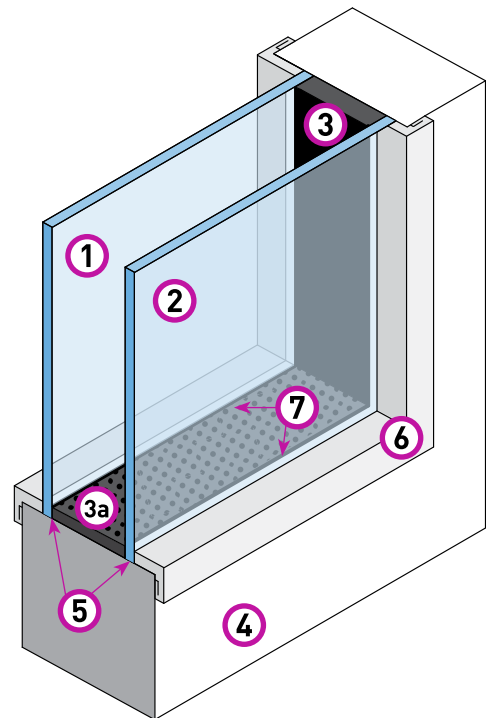

The relationship between the clear view and structural openings for both width and height is the same for all sizes of IAC Super Noise-Lock® W-60 windows. Measurements to consider can be seen in the table below.

	width	height
Structural Opening	<b>X</b>	<b>Y</b>
Clear View*	<b>X - 66mm</b>	<b>Y - 66mm</b>

\* Clear view will decrease for fire rated frames, contact IAC Acoustics for details

## Performance Features

- Acoustically de-coupled high performance steel acoustic window
- Architecturally aesthetic steel capping frame with secret fixings as standard
- Custom-built to order with various options for:
  - angled panes
  - fire resistance
  - bullet resistance