


LOW FREQUENCY ELASTOMER MOUNTS: **BF**

DEFINITION
series BFB

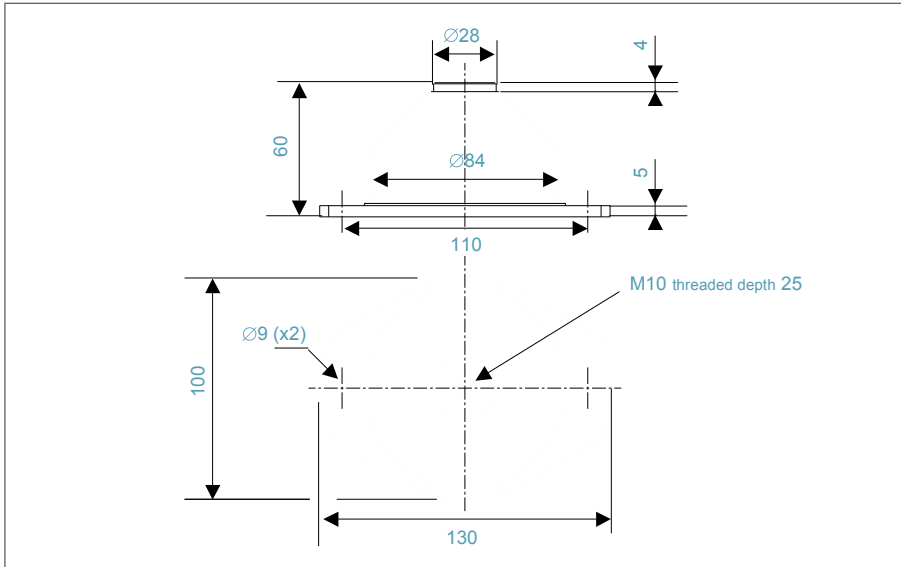

- Multidirectional anti-vibration/shock mounts.
- Displacement under shock up to 30mm.
- Transmissibility : $Q < 6$.
- Maximum static loading 3g.
- Resonant frequency between 8 and 14Hz (*).
- Max peak output at resonance up to 1,25mm.
- Temperature range: -30°C +100°C.
- Great adaptability / versatility.

SPECIALS ON REQUEST
(materials, size and interfaces, etc.).

Dimensions are in mm. For reference only.

SERIE
Materials and finishes
BFB
Elastomer: polychloroprene
Top and bottom interfaces: corrosion protected steel
Other materials on request

LOAD	static load (daN)		axial stiffness	mass
	capability	mini	maxi	(N.mm ⁻¹)
1	15	45	85	0.60
2	30	70	145	
3	50	120	250	

EXAMPLE
BFB2



PREFIX:
'low frequency' mount
from the **BFB** series

MODEL: 2
min static load: 30 daN
max static load: 70 daN
axial average stiffness:
145 N.mm⁻¹



(*) Note: Resonant frequency between 6 and 12Hz along radial direction.